


# GS061

## Light sensor

Me

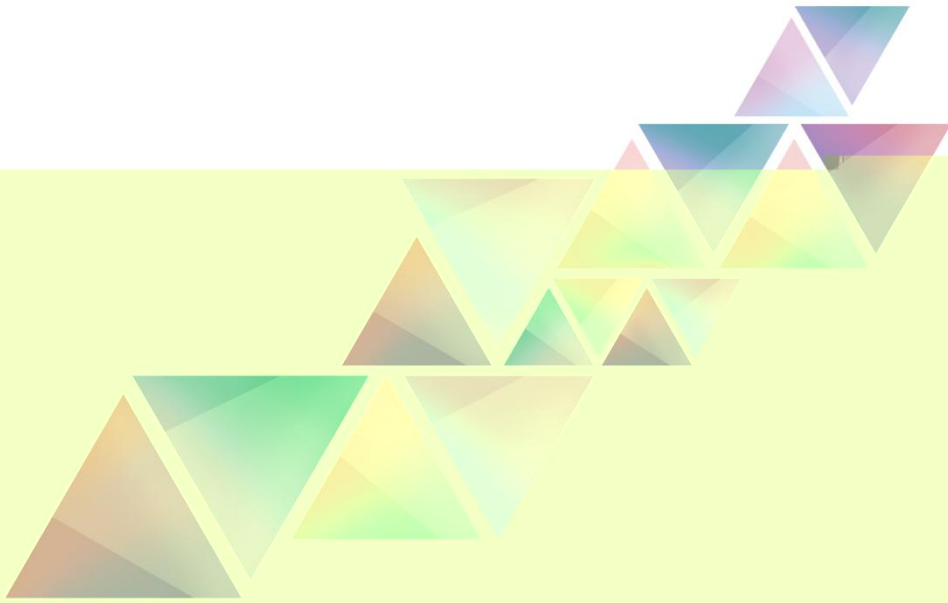


TEL 400 150 0000

北京凯信达科技股份有限公司

### Version record

version number	Change details	release time
V1.0	first release	2018.12.20
V1.1	change cover	2021.10.25

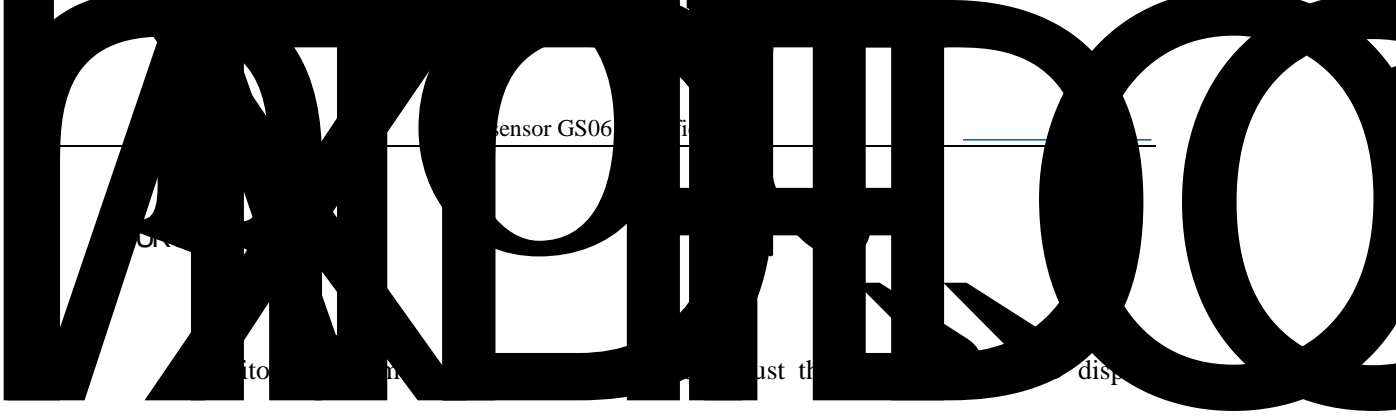

according to environmental brightness value and brightness adjustment strategy set up before,  
to achieve the aim of environmental protection and ensuring best viewing effect.

- Monitor the ambient brightness to achieve automatic brightness adjustment of LED display.
- Connect to sending card to adjust the brightness.
- Connect with multifunction card , choose one of four optional extended interfaces.
- 5-meter standard wire , can be extended to 100 meters.
- No external power supply required..
- For

Project	Parameter values
Rated voltage	DC 3.5V-6V
Working temperature	-10 - 70
Working humidity	0% - 95%
Brightness range	0~65535Lux
Wire length	5m