




北京科星

Beijing KYSTAR

Version history

Panel description

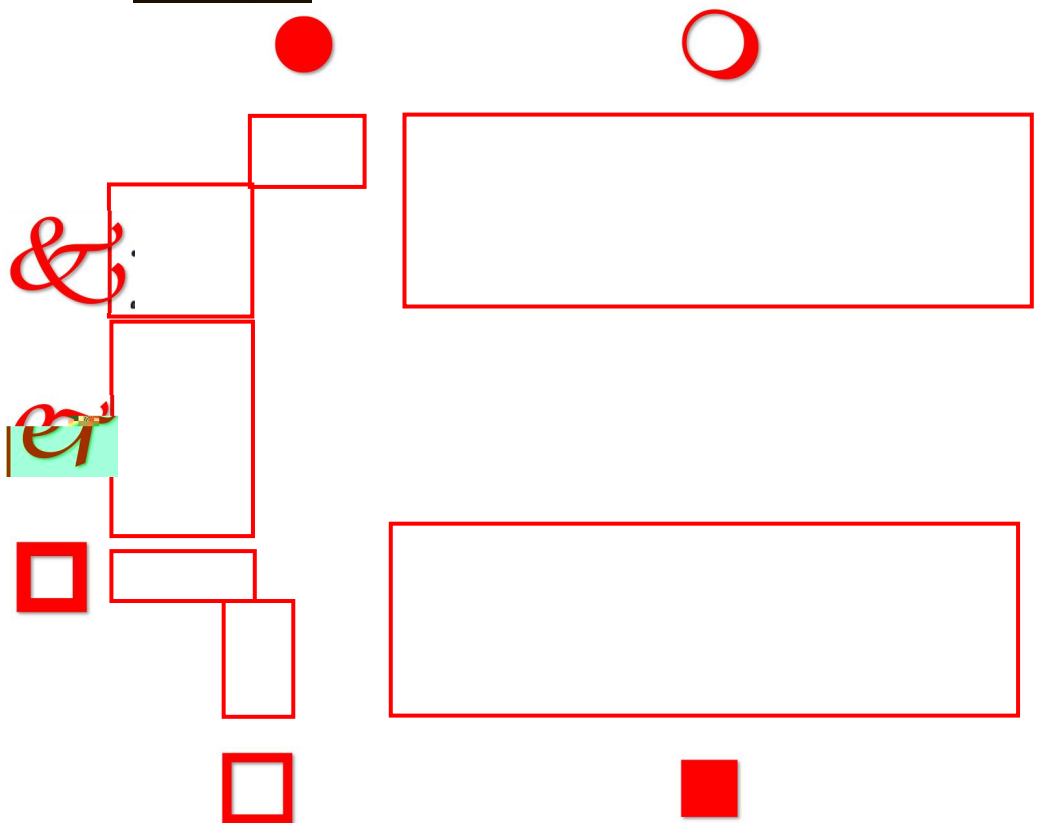

Serial number	Function description
	Two Gigabit Ethernet ports indicating a half-duplex and a full-duplex
	Terminal block available in 5V, 0V and GND
	Inline connector available in 5V, 0V and GND
	Port for JP1 or JP2 (right)
	Port for JP1 or JP2 (left)
	LED signal indicator
	JP1 docking LCD color sensor for the opening area of the receiving card

